




maxpro

■ **MAXPRO SYNERGY SDN. BHD.**
(1288437-T)

COMPANY PROFILE

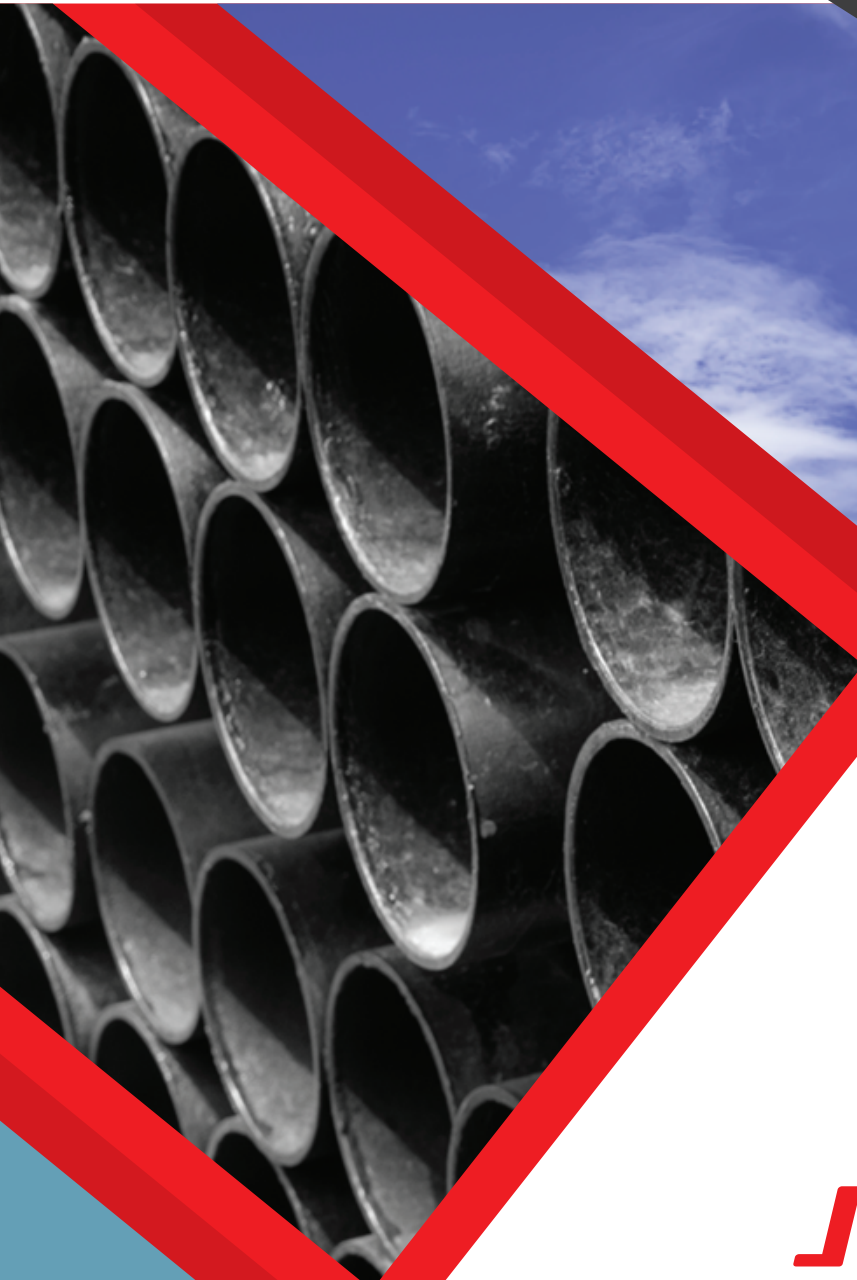

CONTENTS

1. Company Information	2
2. Company Introduction	3
3. Organization Chart	4
4. Product Information – Precast Products	5 - 8
5. Product Information – Pipes	9 - 10

COMPANY INFORMATION

Company Name : Maxpro Synergy Sdn. Bhd.

Company Registration No. : 1288437-T

Company Address : Level 15, DPulze,
Lingkar Cyber Point Timur, Cyber 12,
63000 Cyberjaya, Selangor Darul Ehsan.

Telephone No. : 03 – 8320 8221

Fax No. : 03 – 8320 8001

Email Address : Maxpro.synergy@gmail.com




COMPANY INTRODUCTION

MAXPRO SYNERGY SDN. BHD. Was incorporated on 1st August 2018 with the objectives to provide electrical and telecommunication infrastructure products to customers. Ever since its establishment, the company has been growing steadily.


Our core business is design and trade precast manhole, precast manhole accessories and pipes which protect the underground wires and cables and connect different manhole on a standalone basis or together with our precast manhole to customers.

With our strength and strategic alliance, we are now researching more effective and user-friendly products, which in time to come will help both ourselves and our customers in reducing operational cost. We do cater to custom-made designs to suit special requirements. We are also expanding our services by providing installation services when required.

What is, I win, but you win too?

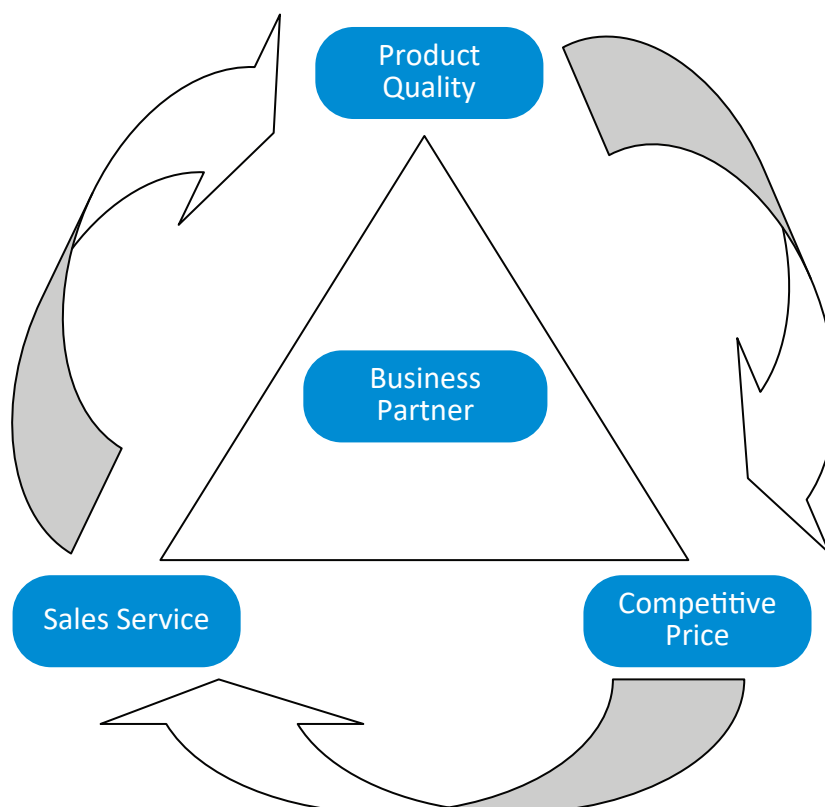

ORGANIZATION CHART

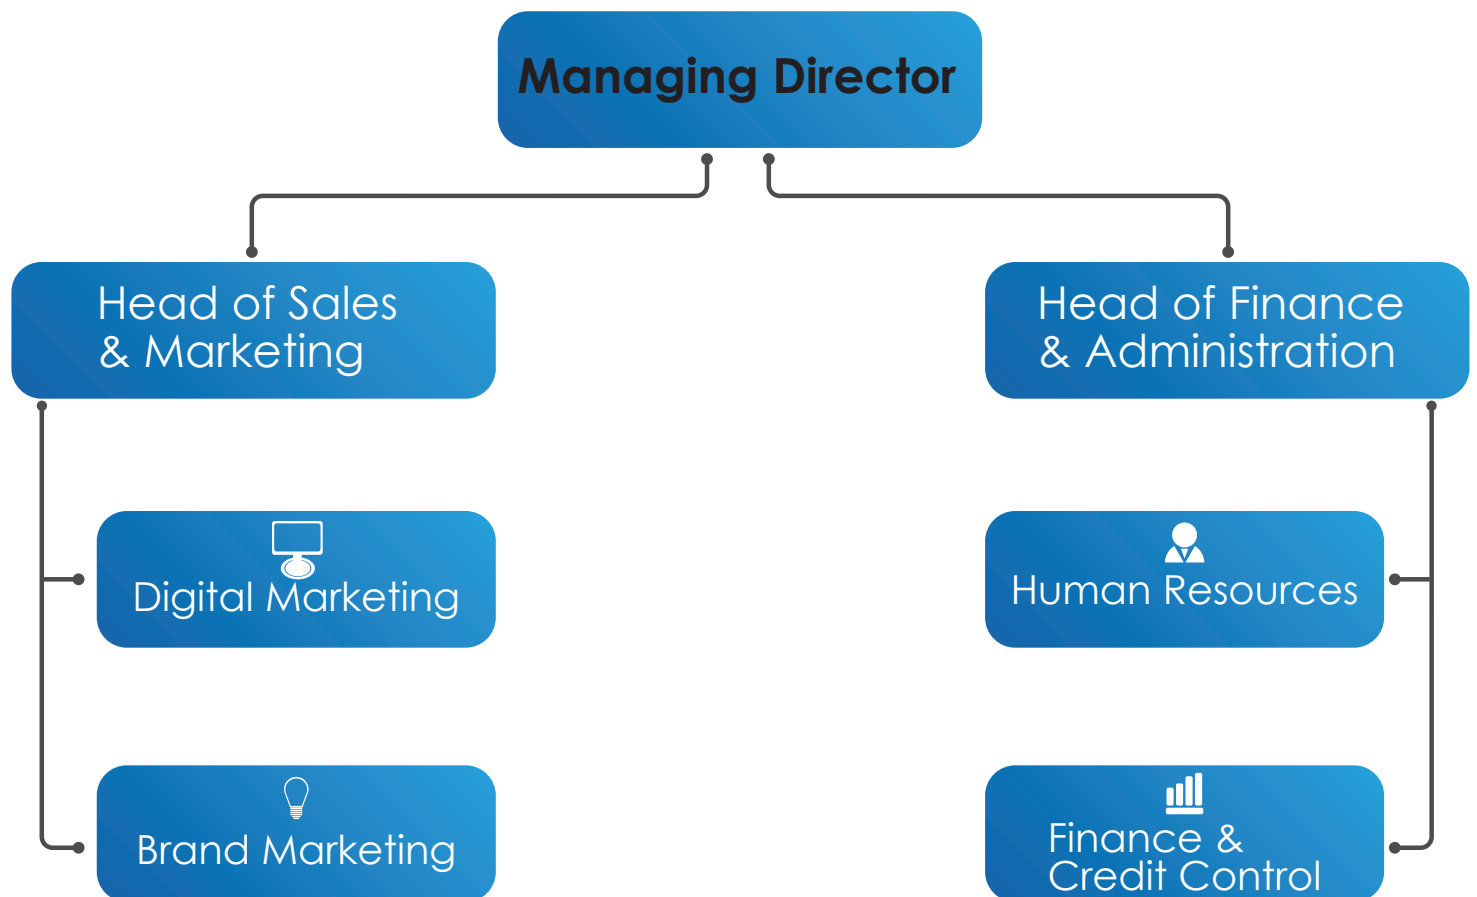

PRECAST PRODUCTS

TELECOMMUNICATION

Type	JB30 (Heavy-Duty)
Sizes (External)	950mm (L) x 950mm (W) x 850mm (H)
Sizes (Internal)	750mm (L) x 750mm (W) x 650mm (H)
Approximate Weight	1060 KG



Type	JB30 (Light-Duty)
Sizes (External)	950mm (L) x 650mm (W) x 625mm (H)
Sizes (Internal)	750mm (L) x 450mm (W) x 450mm (H)
Approximate Weight	550 KG



Type	JRC7
Sizes (External)	1195mm (L) x 890mm (W) x 1050mm (H)
Sizes (Internal)	915mm (L) x 610mm (W) x 760mm (H)
Approximate Weight	1600 KG



Type	JC9
Sizes (External)	1800mm (L) x 890mm (W) x 1460mm (H)
Sizes (Internal)	1500mm (L) x 590mm (W) x 1000mm (H)
Approximate Weight	2700 KG



Note:

* It is our policy to continuously review and improve products & design information in this booklet is therefore subject to change without notice.


PRECAST PRODUCTS

TELECOMMUNICATION

Type	JC9C
Sizes (External)	2080mm (L) x 1220mm (W) x 1480mm (H)
Sizes (Internal)	1760mm (L) x 900mm (W) x 1000mm (H)
Approximate Weight	4000 KG



Type	Pit 12" x 12" x 12"
Sizes (External)	400mm (L) x 400mm (W) x 400mm (H)
Sizes (Internal)	300mm (L) x 300mm (W) x 300mm (H)
Approximate Weight	120 KG

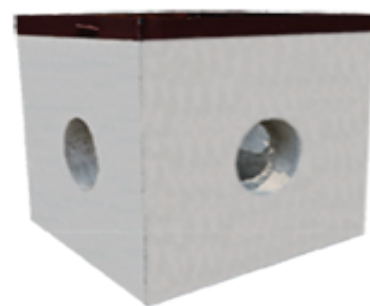

Type	Pit 18" x 18" x 18"
Sizes (External)	550mm (L) x 550mm (W) x 550mm (H)
Sizes (Internal)	450mm (L) x 450mm (W) x 450mm (H)
Approximate Weight	170 KG



Type	Pit 18" x 30" x 18"
Sizes (External)	850mm (L) x 550mm (W) x 550mm (H)
Sizes (Internal)	750mm (L) x 450mm (W) x 450mm (H)
Approximate Weight	230 KG



Note:

* It is our policy to continuously review and improve products & design information in this booklet is therefore subject to change without notice.


PRECAST PRODUCTS

ELECTRICAL


Type	Street Lighting Footings
Sizes (External)	300mm (L) x 300mm (W) x 600mm / 900mm (H)
Sizes (External)	450mm (L) x 450mm (W) x 1000mm / 1200mm (H)
Sizes (External)	500mm (L) x 500mm (W) x 1000mm / 1200 (H)



Type	6' x 6' x 4'(1800mm x 1800mm x 1200mm)
Sizes (External)	2080mm (L) x 2080mm (W) x 1630mm (H)
Sizes (Internal)	1790mm (L) x 1790mm (W) x 1200mm (H)
Approximate Weight	7800 KG

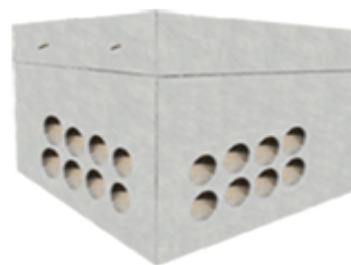

Type	4' x 4' x 4'(1200mm x 1200mm x 1200mm)
Sizes (External)	1530mm (L) x 1530mm (W) x 1650mm (H)
Sizes (Internal)	1200mm (L) x 1200mm (W) x 1200mm (H)
Approximate Weight	4800 KG



Type	4' x 3' x 2'(1200mm x 800mm x 650mm)
Sizes (External)	1400mm (L) x 1100mm (W) x 1050mm (H)
Sizes (Internal)	1200mm (L) x 800mm (W) x 650mm (H)
Approximate Weight	2000 KG

Type	6' x 4' x 4'(1800mm x 1200mm x 1200mm)
Sizes (External)	2110mm (L) x 1530mm (W) x 1620mm (H)
Sizes (Internal)	1790mm (L) x 1210mm (W) x 1200mm (H)
Approximate Weight	5000 KG

Note:

* It is our policy to continuously review and improve products & design information in this booklet is therefore subject to change without notice.

PRECAST PRODUCTS

PEDESTAL PLINTH

Type	Pedestal Plinth
Sizes (External)	480mm (W) x 430mm (H) x 400mm (L)
Sizes (Internal)	380mm (W) x 330mm (H) x 340mm (L)
Approximate Weight	100 KG



Type	Pedestal Plinth
Sizes (External)	490mm (W) x 490mm (H) x 400mm (L)
Sizes (Internal)	—
Approximate Weight	180 KG




Type	Pedestal Plinth
Sizes (External)	480mm (W) x 330mm (H) x 700mm (L)
Sizes (Internal)	—
Approximate Weight	270 KG



MANHOLE COVER



KUMBAHAN



3E (Square)



7E (Rectangular)

Note:

* It is our policy to continuously review and improve products & design information in this booklet is therefore subject to change without notice.

High Density Polyethylene(HDPE)Pipe




The advantage of using HDPE SMOOTH PIPE:-

- Underground Installation. (Flexible & Durability.).
- Cable Protection System.
(Tough and Strong, Weather & Impact Resistance.)

Pipe OD Dia. (mm)	PN 8		PN 10		Standard Length of Pipe (Meter)
	Wall Thickness (WT)		Wall Thickness (WT)		
	Min. (mm)	Max. (mm)	Min. (mm)	Max. (mm)	
110mm	6.6	7.4	8.1	9.1	6m, 12m, 100m
160mm	9.5	10.6	11.8	13.1	6m, 12m
200mm	11.9	13.2	14.7	16.3	6m, 12m

HDPE DOUBLE WALL CORRUGATED PIPES



Advantages:

- Corrugated Exterior Adds Strength.
- Light Weight.
- Simple Installation.

Pipe ID Dia. (mm)	Pipe OD Dia. (mm)	Standard Length of Pipe (Meter)
100mm	117mm ±	6m, 50m
150mm	174mm ±	6m, 30m
200mm	235mm ±	6m

HDPE CORRUGATED SUB-DUCT



Outside Dia. (mm)	Inside Dia. (mm)	Corrugated Wall Thickness(mm)	Standard Length (m)
32	26	3.0	250
40	34	3.0	250
50	44	3.0	250

HDPE DUCT (PN10 PIPE) TELECOMMUNICATION PIPE



Outside Diameter (mm)	Wall Thickness min (mm)	Standard Length (m)
110	8.1	100

PVC CONDUIT TELECOMMUNICATION CABLES



Outside Diameter (mm)	Wall Thickness min (mm)	Standard Length (m)
107	2.6	6

PVC PIPE FOR INDUSTRIAL USE



Nominal Size (mm)	Outside Dia. (mm) Min - Max	Wall Thickness (mm)	Standard Length (m)
100 mm	114.1 - 114.5	3.4 - 4.0	5.8
155 mm	168.0 - 168.5	4.5 - 5.2	5.8
200 mm	218.8 - 219.4	5.3 - 6.1	5.8

